



MULTIGUARD - TRELLIS DOORS



Expanding Trellis Doors - MULTIGUARD

The Multiguard is a high security steel expanding trellis grille system. The security door is fully framed, suspended from a top track on rollers and has a bottom guide track, which provides high resistance to violent attack. The retractable grille is easy to operate and requires minimum to no maintenance. The attractive lattice designs allows the grille to stack to 20% of its opening size. The removable bottom track makes concertina door ideal for entrance door security where unrestricted access is required. We keep multiguard in stock for a short installation lead time. Available in either white or black powder coated finish. Multiguard can protect unlimited shop front width and has a maximum height of 3 metres. Multiguard is recommended by New Zealand insurance companies.


- Strong visual deterrent
- Manufactured in steel to resist a violent attack
- Recommended by insurance companies
- Excellent visibility into the store
- Smooth glide on top track
- Available in a black or white power coat
- Minimum to no maintenance required
- Ideal for store fronts Short installation lead time

When should you choose Multiguard?

When a full opening is to be secured top to bottom, the Multiguard leaves no gaps. For Smooth-running and ease of use. The Multiguard is on rollers at the top needing a lot less effort to slide. (For openings higher than 3m, Colours other than Black or White, or for Outdoor please see 'Expandoor')




MULTIGUARD - Technical Specifications

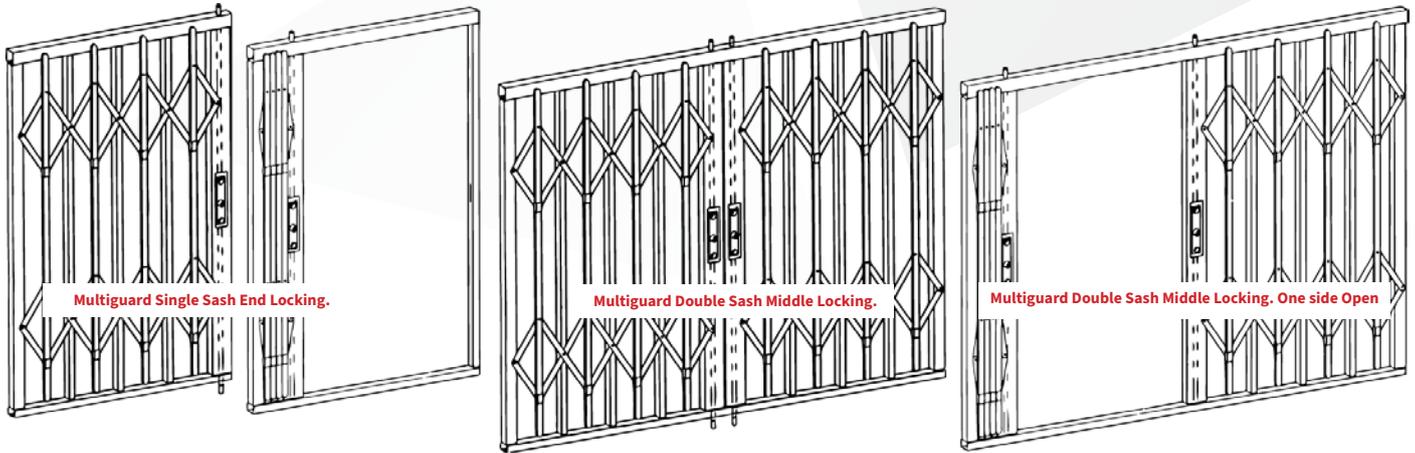

Available with the following options:

- Heights up to 3m
- Black or White
- Standard Lock or High-Security Lock post
- U Channel or Low Profile T Bottom Track
- Single Sash or Double Sash
- Locking Left, Right, or Middle.


Minimum Timber or Steel Structure Requirement:

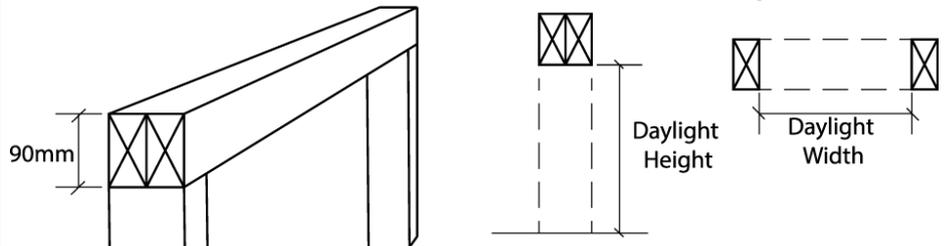


Depth Clearance Requirement:

To give the correct clearance for locks etc the Multiguard top track should be positioned away from any handles or obstructions by at least 90mm to the inside of the top track.


U-Channel Bottom Track option:

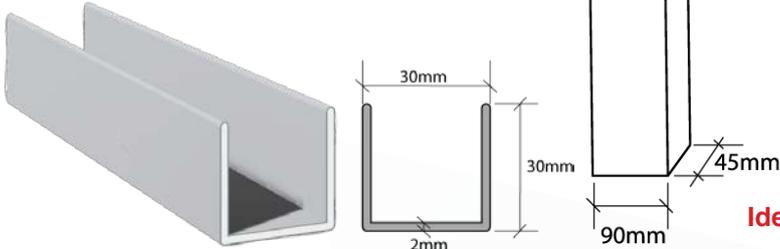

Low-Profile T Bottom Track option:

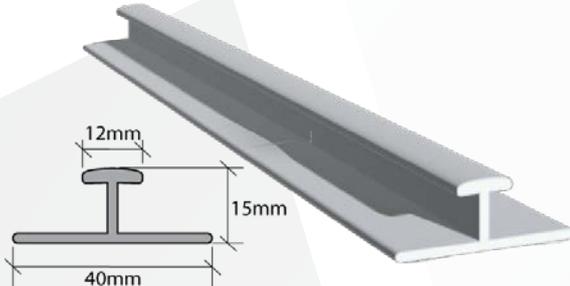

Multiguard Top Track:

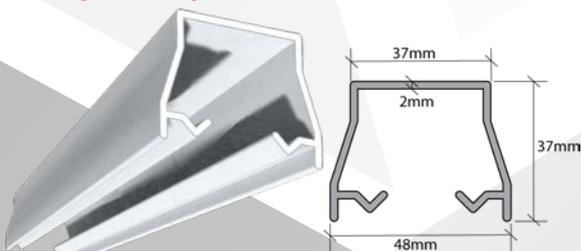

Ideal Top structure to work with:

90mm Minimum
Supported every 600mm
Minimum Scew Nail or better.
(5m Door almost 200Kg)

