






## **Aluminium Shutter - ROLLERSAFE**

An attractive mini roller shutter for smaller and specialist openings. The Rollersafe uses a strong compact double sided extruded profile that gives it added strength and durability.

The Rollersafe Aluminium Roller Shutter is ideal for kiosks, cabinets and over windows.

The Rollersafe uses a 70mm barrel enabling a small overall roll size that requires a lot less room than standard shutters. The rollersafe can be manually operated using spring balanced torsion springs, motorised or used as a Tambour door. It can also be reverse rolled using our new reversible bottom/locking bar.

## **General Specifications:**

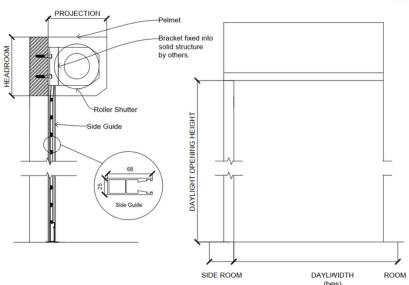

MAX WIDTH)	2500mm (Manual)
	5000mm (Motorised
MAX HFIGHT	2500mm (Manual)
IVIAX HEIGHT	2500mm (Manual)
	3000mm (Motorised)
APPROX.	18 kgs. per sqm
WEIGHT	
SLAT HEIGHT	36mm (double wall)
BARREL TYPES	70mm Octagonal
BRACKETS	4mm duragalv mild steel angles
	and plates
SIDE GUIDES	68mm deep x 25mm wide (face
	fixed or heal fixed)
WIND LOCKS	Yes (optional)



Extruded Aluminium Section incorporating a mohair brush strip underneath to prevent damaging the floor or counter top surfaces. Bottom rail is designed to retract flush with ceiling or lintel when door is opened. Our Bottom Rail can be reversed to allow for reverse mounted doors.

## Motorising

Several options available in single phase models. Additional clearances required, refer to separate data sheets. Optional extras include UPS Battery Backup (single phase), External Keyswitch & Remote Control.

## **Standard Finish**

Satin Silver Anodised Aluminium. Powder coating of a wide range of colours available as an optional extra. Maximum recommended size for manual doors is 1500mm wide x 1200mm high. Contact us for recommendations over this size.



Call us: 0800 334 335

www.xpanda.co.nz