


Fire-Exit Security Grille Safety & Care Guide



✓ Hold Correctly



✓ Keep Area Clear

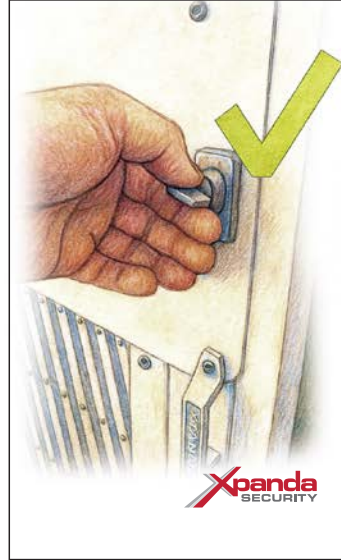

✓ Test Snib Regularly



✗ Don't Hold Lattice

IMPORTANT – Please Read Before Operating

To prevent injury and ensure the grille remains fire-exit compliant, follow these instructions carefully.

FIRE EXIT APPLICATION

This grille MUST allow safe exit during an emergency:

- Never obstruct the internal thumb-turn lock.
- Do not hang items from the lattice. This can restrict the emergency function.
- Test emergency operation monthly – Confirm the grille opens freely, without needing a key from inside.
- Always Ensure the escape route and door area are clear of obstacles or debris.

WARNING: Fire-Exits MUST NOT use additional padlocks or chains on this grille.

EVERYDAY USE SAFETY

- Inspect before use – Check for obstacles or bystanders before operating.
- Always hold the fitted handle when operating – This is the only safe place to grip.
- Keep hands clear of the lattice – Pinch hazards exist in the scissor-action bars.
- Use steady, controlled movement – Never slam, force, or jerk the grille when opening or closing.

WARNING: Forcing the grille when resistance is felt can cause sudden breakage, which may lead to injury.

DAMAGE PREVENTION

- Flat, even surfaces – Door mats, mat wells, or uneven ground can affect operation and reduce product life.
- Stop if you feel resistance – Resistance means something is out of place.

CARE & FUNCTION

- Shoot-bolt holes – Check and clear periodically so bolts engage reliably.
- Castors / rollers / Lock Mechanism – Apply CRC Dry-Glide as needed to maintain smooth movement.